



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet
Product data sheet
HV gate valve, Series 091, DN 100 (ID 4'')
Ordering No. 09140-CE14


Description

Flange	CF-F 100
Actuator	pneumatic, double acting
Feedthrough	Bellows feedthrough

Technical data

Leak rate	
– Valve body	$< 1 \cdot 10^{-9} \text{ mbar ls}^{-1}$
– Valve seat	$< 1 \cdot 10^{-7} \text{ mbar ls}^{-1}$
Pressure range	$1 \cdot 10^{-8} \text{ mbar}$ to 1.2 bar (abs)
Differential pressure on the gate	$\leq 1.2 \text{ bar}$
Conductance (molecular flow)	$1\ 700 \text{ ls}^{-1}$

Max. differential pressure at opening in closing and opening direction with influence to the cycle life

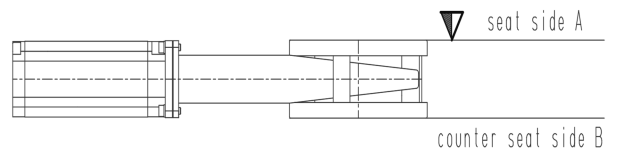

– Higher pressure on seat side A, the differential pressure acts in opening direction	$\leq 1.0 \text{ bar}$ with full cycle life
– Higher pressure on counter seat side B, the differential pressure acts in closing direction	$\leq 30 \text{ mbar}$ with full cycle life
– Higher pressure on counter seat side B, the differential pressure acts in closing direction	$\leq 1.0 \text{ bar}$ with reduced cycle life
Cycles until first service	5 000 (unheated and under clean conditions)
Bellows cycles	100 000 (unheated and under clean conditions)
Bake-out temperature	
– Valve body	$\leq 150 \text{ }^\circ\text{C}$ (bake-out max. 24h)
– Actuator	$\leq 100 \text{ }^\circ\text{C}$

Created by: JOM	Release date:	1/2
Modified by:	Release date:	780431EA



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet
Product data sheet
HV gate valve, Series 091, DN 100 (ID 4'')
Ordering No. 09140-CE14

Heating and cooling rate		50 °C h ⁻¹
Material		
– Valve body		AISI 304 (1.4301)
– Gate		AISI 304 (1.4301), (1.4308)
– Parts (in contact with media)		A2 Ni-Teflon coated, PEEK
– Bellows		AISI 633, (AM350)
Seal		
– Bonnet		FKM (Viton [®])
– Gate		FKM (Viton [®])
– Actuator		FKM (Viton [®])
Mounting position		any
Volume of pneumatic actuator		0.24 l / 0.008 ft ³
Compressed air min. – max. overpressure		4 – 7 bar / 58 – 102 psi
Compressed air connection		M5 (10-32 UNF suitable)
Actuation time		
– closing		≤ 2 s
– opening		≤ 2 s
Behavior in case of compressed air pressure drop	– Valve closed – Valve open	Valve remains closed (≤ 24h) undefined
Behavior in case of power failure	– Valve closed – Valve open	depending on customer installation depending on customer installation
Weight		approx. 7.8 kg / 17.2 lbs

Created by: JOM	Release date:	2/2
Modified by:	Release date:	780431EA