



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV gate valve

Series 091, DN 160 (ID 6'')

Ordering No. 09144-TE01-0001


Description

Flange	ASA-LP 160
Actuator	Manual actuator with detachable handle, self locking in any position, visual position indicator
Number of turns needed for full stroke	41 Turns
Feedthrough	Bellows feedthrough

Technical data

Leak rate	
– Valve body	$< 1 \cdot 10^{-9}$ mbar ls ⁻¹
– Valve seat	$< 1 \cdot 10^{-7}$ mbar ls ⁻¹
Pressure range	$1 \cdot 10^{-8}$ mbar to 1.2 bar (abs)
Differential pressure on the gate	≤ 1.2 bar
Conductance (molecular flow)	5 000 ls ⁻¹

Max. differential pressure at opening in closing and opening direction with influence to the cycle life

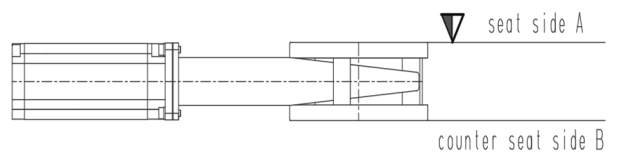

– Higher pressure on seat side A, the differential pressure acts in opening direction	≤ 1.0 bar with full cycle life
– Higher pressure on counter seat side B, the differential pressure acts in closing direction	≤ 30 mbar with full cycle life
– Higher pressure on counter seat side B, the differential pressure acts in closing direction	≤ 1.0 bar with reduced cycle life
Cycles until first service	5 000 (unheated and under clean conditions)
Bellows cycles	100 000 (unheated and under clean conditions)
Bake-out temperature	
– Valve body	≤ 150 °C (bake-out max. 24h)
– Actuator	≤ 100 °C

Created by: HDE	Release date: 20.06.2019	1/2
Modified by:	Release date:	985688EA



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV gate valve

Series 091, DN 160 (ID 6")

Ordering No. 09144-TE01-0001

Heating and cooling rate	50 °C h ⁻¹
Material	
– Valve body	AISI 304 (1.4301)
– Bonnet	EN AW-5083 (3.3547)
– Gate	AISI 304 (1.4301), (1.4308)
– Parts (in contact with media)	A2 Ni-Teflon coated, PEEK
– Bellows	AISI 633, (AM350)
Seal	
– Bonnet	FKM (Viton®)
– Gate	FKM (Viton®)
– Actuator	FKM (Viton®)
Mounting position	any
Weight	approx. 17 kg / 37.5 lbs

Created by: HDE	Release date: 20.06.2019	2/2
Modified by:	Release date:	985688EA