



VAT Vakuumventile AG  
CH-9469 Haag, Schweiz

## Product data sheet

**UHV gate valve, Series 108, DN 320 (ID 12'')**  
**Ordering No. 10850-TE08**

### Description

Flange	ASA-LP 320
Actuator	manual, handwheel – with position indicator
Feedthrough	Bellows

### Technical data

Leak rate	– Valve body	$< 5 \cdot 10^{-10}$ mbar ls <sup>-1</sup>
	– Valve seat	$< 1 \cdot 10^{-9}$ mbar ls <sup>-1</sup>
Pressure range		$1 \cdot 10^{-10}$ mbar to 1.2 bar (abs)
Differential pressure on the gate		$\leq 1.2$ bar
Differential pressure at opening		$\leq 30$ mbar
Conductance (molecular flow)		27 450 ls <sup>-1</sup>
Cycles until first service		50 000 (unheated and under clean conditions)
Temperature	– Valve Body	$\leq 250$ °C open / $\leq 200$ °C closed (bake-out max. 24h)
(Maximum values: depending on operating conditions and sealing materials)	– Actuator	$\leq 250$ °C
	– Position indicator	$\leq 80$ °C
Heating and cooling rate		50 °C h <sup>-1</sup>
Material (main components)	– Valve Body	AISI 304 (1.4301)
	– Mechanism	AISI 316L (1.4404), AISI 304 (1.4301)
	– Bellows	AISI 316L (1.4404, 1.4435)
Seal	– Bonnet	metal
	– Gate	FKM (Viton®), O-ring
Mounting position		any
Weight		86 kg / 190 lbs

Created by: SON	Release date: 2015-02-23	1 of 2
Modified by:	Release date:	<b>774812EA</b>



VAT Vakuumventile AG  
CH-9469 Haag, Schweiz

## Product data sheet

**UHV gate valve, Series 108, DN 320 (ID 12'')**  
**Ordering No. 10850-TE08**

### Position indicator

Type


Micro switch

Voltage

≤ 50 V AC / DC

Current max.

≤ 1.2 A

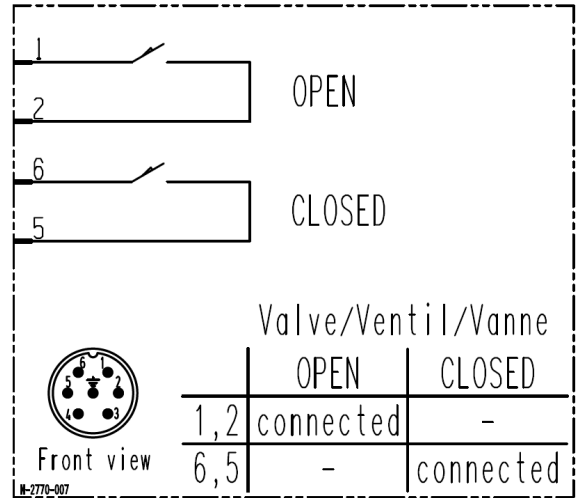

Created by: SON	Release date: 2015-02-23	2 of 2
Modified by:	Release date:	<b>774812EA</b>