



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

Vacuum gate valve, Series 121, DN 80 (ID 3'')
Ordering No. 12138-JA24

Description

Flange	JIS 80
Actuator	Pneumatic, double acting – with position indicator
Feedthrough	Shaft feedthrough

Technical data

Leak rate	– Valve body	$< 1 \cdot 10^{-9}$ mbar ls ⁻¹
	– Valve seat	$< 1 \cdot 10^{-9}$ mbar ls ⁻¹
Pressure range		$1 \cdot 10^{-7}$ mbar to 1.6 bar (abs)
Differential pressure on the gate		≤ 1.6 bar
Differential pressure at opening		≤ 30 mbar
Conductance (molecular flow)		1 000 ls ⁻¹
Cycles until first service		200 000 (unheated and under clean conditions)
Temperature	– Valve body	≤ 120 °C
(Maximum values: depending on operating conditions and sealing materials)	– Actuator	≤ 80 °C
	– Position indicator	≤ 80 °C
Heating and cooling rate		30 °C h ⁻¹
Material	– Valve body	EN AW-5083 (3.3547), -6061 (3.3211)
	– Mechanism	AISI 304 (1.4301)
Seal	– Bonnet	FKM (Viton®)
	– Gate	FKM (Viton®), O-ring
	– Actuator	FKM (Viton®), NBR (BUNA N®)
Mounting position		any
Volume of pneumatic actuator		0.2 l / 0.007 ft ³
Compressed air min. – max. overpressure		4–7 bar / 58–102 psi
Compressed air connection		M5 (10–32 UNF suitable)
Actuation time	– closing	1.7 s
	– opening	1.7 s
Weight		4.3 kg / 9.5 lbs

Created by: SON	Release date: 2016-06-13	1 of 2
Modified by:	Release date:	600936EA



VAT Vakuumventile AG
CH-9469 Haag, Schweiz


Product data sheet

Vacuum gate valve, Series 121, DN 80 (ID 3'')
Ordering No. 12138-JA24

- | | | |
|--|----------------|--------------------------------------|
| Behavior in case of compressed air pressure drop | - Valve closed | - valve remains closed |
| | - Valve open | - undefined |
| Behavior in case of power failure | - Valve closed | - depending on customer installation |
| | - Valve open | - depending on customer installation |

Position indicator

Type	Micro Switch
Voltage	≤ 250 V AC ≤ 50 V DC
Current max.	≤ 2.0 A ≤ 1.2 A

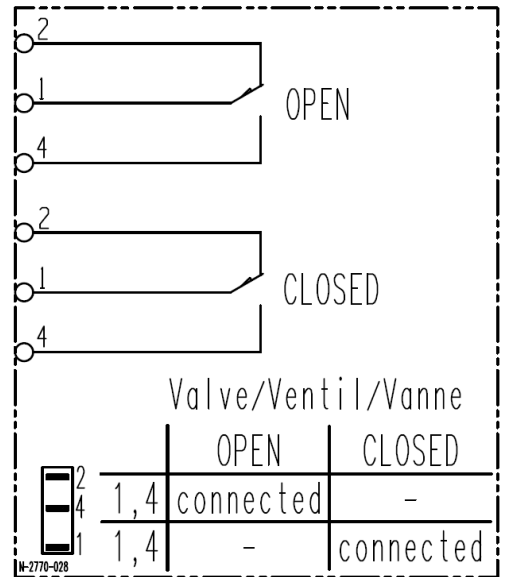

Wiring diagram

Created by: SON	Release date: 2016-06-13	2 of 2
Modified by:	Release date:	600936EA