



VAT Vakuumventile AG  
CH-9469 Haag, Schweiz

## Product data sheet

**HV gate valve, Series 140, DN 160 (ID 6'')**  
**Ordering No. 14044-UE08**

### Description

Flange	CF-F 160 UNF
Actuator	Manual, hand wheel
Feedthrough	Rotary feedthrough

### Technical data

Leak rate	– Valve body	$< 1 \cdot 10^{-9}$ mbar ls <sup>-1</sup>
	– Valve seat	$< 1 \cdot 10^{-9}$ mbar ls <sup>-1</sup>
Pressure range		$1 \cdot 10^{-8}$ mbar to 2 bar (abs)
Differential pressure on the gate		$\leq 2$ bar
Differential pressure at opening		$\leq 30$ mbar
Conductance (molecular flow)		5 150 ls <sup>-1</sup>
Cycles until first service	– Unheated and under clean conditions	200 000
Temperature	– Valve body	$\leq 150$ °C
(Maximum values: depending on operating conditions and sealing materials)	– Actuator	$\leq 80$ °C
	– Position indicator	$\leq 80$ °C
Heating and cooling rate		50 °C h <sup>-1</sup>
Material (main components)	– Valve body	AISI 304 (1.4301)
	– Mechanism	AISI 304 (1.4301), AISI 316L (1.4404)
Seal	– Bonnet	FKM (Viton®), O-ring
	– Gate	FKM (Viton®), O-ring
	– Actuator	FKM (Viton®), NBR
Mounting position		any
Weight		25 kg / 55 lbs

Created by: JOM	Release date: 2015-02-18	1 of 2
Modified by:	Release date:	<b>787491EA</b>



VAT Vakuumventile AG  
CH-9469 Haag, Schweiz

## Product data sheet

**HV gate valve, Series 140, DN 160 (ID 6'')**

**Ordering No. 14044-UE08**

### Position indicator

Type


Micro switch

Voltage

≤ 250 V AC    ≤ 50 V DC

Current max.

≤ 5 A        ≤ 3 A

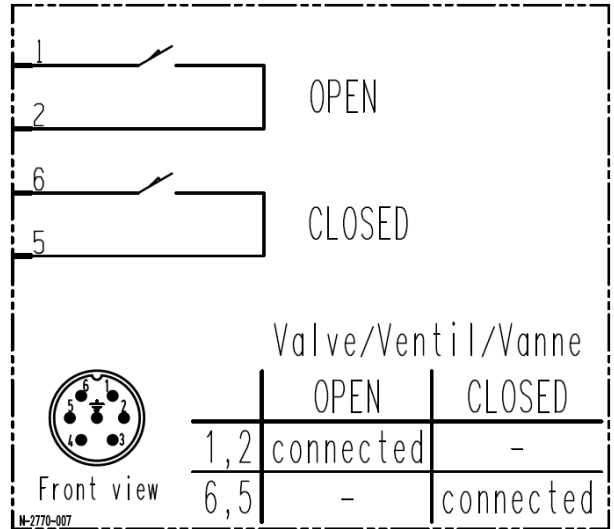

Created by: JOM	Release date: 2015-02-18	2 of 2
Modified by:	Release date:	<b>787491EA</b>