



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV gate valve, Series 140, DN 160 (6")
Ordering No. 14044-UE28

Description

Flange	CF-F 160 UNF
Actuator	Pneumatic, with 3-position actuator – with position indicator
Feedthrough	Rotary feedthrough

Technical data

Leak rate	– Valve body	$< 1 \cdot 10^{-9}$ mbar ls ⁻¹
	– Valve seat	$< 1 \cdot 10^{-9}$ mbar ls ⁻¹
Pressure range		$1 \cdot 10^{-8}$ mbar to 2 bar (abs)
Differential pressure on the gate		≤ 2 bar
Differential pressure at opening		≤ 30 mbar
Conductance (molecular flow)	– Nominal	5'150 ls ⁻¹
	– Min. adjustable	7.5 ls ⁻¹
Cycles until first service	– Unheated and under clean conditions	200'000
Temperature (Maximum values: depending on operating conditions and sealing materials)	– Valve body	≤ 150 °C
	– Actuator	≤ 50 °C
	– Position indicator	≤ 80 °C
Heating and cooling rate		50 °C h ⁻¹
Material (main components)	– Valve body	AISI 304 (1.4301)
	– Mechanism	AISI 304 (1.4301), AISI 301 (1.4310), AISI 316L (1.4404)
Seal	– Bonnet	FKM (Viton®), vulcanized
	– Gate	FKM (Viton®), O-ring
	– Actuator	FKM (Viton®), NBR
Mounting position		any
Volume of pneumatic actuator		0.96 l / 0.034 ft ³
Compressed air min. – max. overpressure		4 – 7 bar / 58 – 102 psi
Compressed air connection		G $\frac{1}{8}$ " ($\frac{1}{8}$ " NPT for USA)
Actuation time	– closing	≤ 3.5 s
	– opening	≤ 3.5 s
Weight		30 kg / 66 lbs

Created by: NIW	Release date: 27.10.2020	1/2
Modified by:	Release date:	1061113EA



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet


HV gate valve, Series 140, DN 160 (6")
Ordering No. 14044-UE28

Behavior in case of compressed air pressure drop	– Valve closed – Valve open – Middle position	valve remains closed undefined undefined
Behavior in case of power failure	– Valve closed – Valve open – Middle position	depending on customer installation depending on customer installation depending on customer installation
Valve position indication		visual (mechanical)

Electrical connections

Position indicator

Type	Micro switch	
Voltage	≤ 250 V AC	≤ 50 V DC
Current max.	≤ 5 A	≤ 3 A

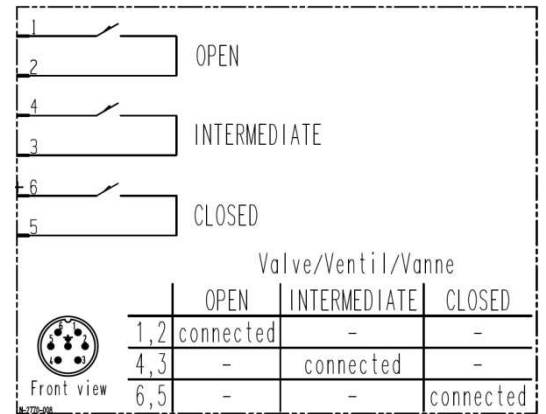

Wiring diagram

Created by: NIW	Release date: 27.10.2020	2/2
Modified by:	Release date:	1061113EA