



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV gate valve, Series 140, DN 400 (ID 16'')
Ordering No. 14052-JE24

Description

Flange	JIS 400
Actuator	Pneumatic, double acting – with position indicator
Feedthrough	Rotary feedthrough

Technical data

Leak rate	– Valve body – Valve seat	$< 1 \cdot 10^{-9}$ mbar ls ⁻¹ $< 1 \cdot 10^{-9}$ mbar ls ⁻¹
Pressure range		$1 \cdot 10^{-8}$ mbar to 1.2 bar (abs)
Differential pressure on the gate		≤ 1.2 bar
Differential pressure at opening		≤ 30 mbar
Conductance (molecular flow)		52 000 ls ⁻¹
Cycles until first service	– Unheated and under clean conditions	200 000 (valve in horizontal position) 50 000 (valve in vertical position)
Temperature (Maximum values: depending on operating conditions and sealing materials)	– Valve body – Pneumatic actuator – Position indicator	≤ 150 °C ≤ 50 °C ≤ 80 °C
Heating and cooling rate		50 °C h ⁻¹
Material (main components)	– Valve body – Mechanism	AISI 304 (1.4301) AISI 304 (1.4301)
Seal	– Bonnet – Gate – Actuator	FKM (Viton®), O-ring FKM (Viton®), O-ring FKM (Viton®), NBR
Mounting position		horizontal (vertical with restriction)
Volume of pneumatic actuator		0.75 l / 0.025 ft ³
Compressed air min. – max. overpressure		4 – 7 bar / 58 – 102 psi
Compressed air connection		G $\frac{1}{8}$ '' (1/8'' NPT for USA)
Actuation time	– closing – opening	5.5 s 5.5 s
Weight		135 kg / 297.6 lbs

Created by: MAEM	Release date: 2013-04-15	1 of 2
Modified by:	Release date:	601373EA



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV gate valve, Series 140, DN 400 (ID 16'')

Ordering No. 14052-JE24

Behavior in case of compressed air pressure drop – Valve closed
– Valve open


valve remains closed
undefined

Behavior in case of power failure – Valve closed
– Valve open

depending on customer installation
depending on customer installation

Position indicator

Type Micro switch
Voltage ≤ 250 V AC ≤ 50 V DC
Current max. ≤ 5 A ≤ 3 A

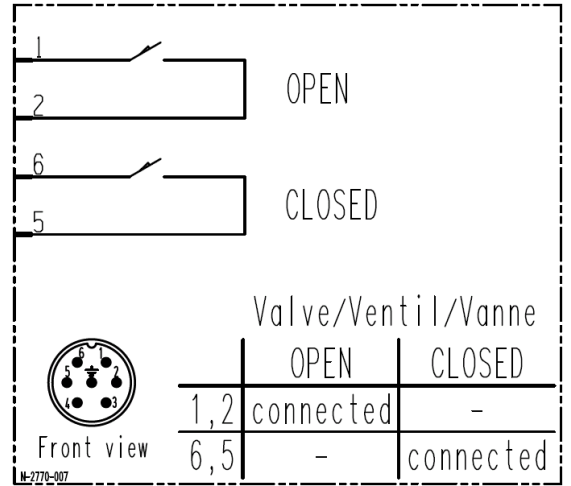

Wiring diagram

Created by: MAEM	Release date: 2013-04-15	2 of 2
Modified by:	Release date:	601373EA