



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

Pendulum valve, Series 162, DN 200 (ID 8'')
Ordering No. 16246-TA28

Description

Flange	ASA-LP 200
Actuator	– 3-position pneumatic with closing spring (NC) – with position indicators
Feedthrough	Rotary feedthrough

Technical data

Leak rate	– Valve body – Valve seat	$< 1 \cdot 10^{-9}$ mbar ls ⁻¹ $< 1 \cdot 10^{-9}$ mbar ls ⁻¹
Pressure range		$1 \cdot 10^{-8}$ mbar to 1.2 bar (abs)
Differential pressure on the gate		≤ 1.2 bar
Differential pressure at opening		≤ 10 mbar
Conductance (molecular flow)		11 000 ls ⁻¹
Cycles until first service		200 000 (unheated and under clean conditions)
Temperature (Maximum values: depending on operating conditions and sealing materials)	– Valve body – Actuator – Position indicator	≤ 120 °C ≤ 80 °C ≤ 80 °C
Heating and cooling rate		≤ 30 °C h ⁻¹
Material	– Valve body, gate, sealing ring – Feedthrough	EN AW-5083 (3.3547), EN AW-6082 (3.2315) AISI 303 (1.4305), AISI 304 (1.4301)
Seal	– Bonnet – Gate, dynamic – Feedthrough	FKM (Viton®) FKM (Viton®) FKM (Viton®)
Mounting position		any
Volume of pneumatic actuator		0.30 l / 0.010 ft ³
Compressed air min. – max. overpressure		5 – 7 bar / 73 – 102 psi
Compressed air connection		M5 (10-32 UNF suitable)
Actuation time	– closing – opening	4 s 4 s
Weight		23 kg / 50.7 lbs

Created by: SWA	Release date: 28.08.2018	1/2
Modified by:	Release date:	951837EA



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

Pendulum valve, Series 162, DN 200 (ID 8")
Ordering No. 16246-TA28

Behavior in case of compressed air pressure drop – Valve closed
– Valve open


valve remains closed
valve closes

Behavior in case of power failure – Valve closed
– Valve open

depending on customer installation
depending on customer installation

Position indicator

Type Micro switch
Voltage ≤ 50 V AC
Current max. ≤ 1.2 A

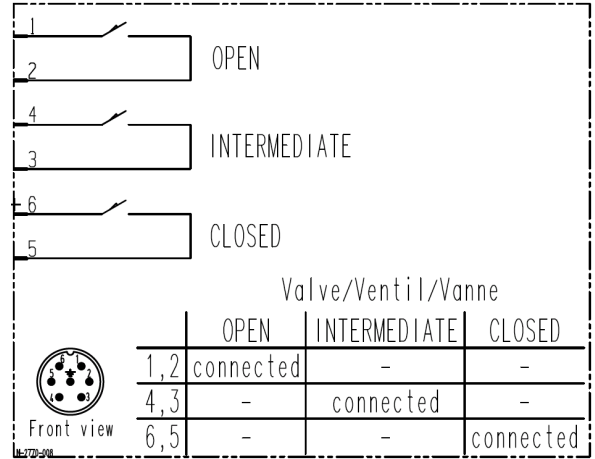

Wiring diagram

Created by: SWA	Release date: 28.08.2018	2/2
Modified by:	Release date:	951837EA