



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

Large vacuum gate valve, Series 190, DN 400 (ID 16'')
Ordering No. 19052-PE44-0002

Description

Flange	ISO-F 400
Actuator	pneumatic, double acting – with solenoid valve – with position indicator
Feedthrough	Shaft feedthrough

Technical data

Leak rate	– Valve body – Valve seat	$< 1 \cdot 10^{-9}$ mbar ls ⁻¹ $< 1 \cdot 10^{-9}$ mbar ls ⁻¹
Pressure range		$1 \cdot 10^{-7}$ mbar to 1 bar (abs)
Differential pressure on the gate	– in opening direction – in closing direction	≤ 1 bar ≤ 1 bar
Differential pressure at opening		≤ 20 mbar
Conductance (molecular flow)		50 000 ls ⁻¹
Cycles until first service		100 000 (unheated and under clean conditions)
Temperature (Maximum values: depending on operating conditions and sealing materials)	– Valve body – Actuator – Solenoid valve – Position indicator	≤ 150 °C ≤ 80 °C ≤ 50 °C ≤ 80 °C
Heating and cooling rate		30 °C h ⁻¹
Material	– Valve body – Mechanism	AISI 304 (1.4301) EN AW-6082 (3.2315), AISI 304 (1.4301)
Seal	– Bonnet – Gate – Actuator	FKM (Viton®) FKM (Viton®) NBR
Mounting position		any
Volume of pneumatic actuator		5.9 l / 0.208 ft ³
Compressed air min. – max. overpressure		5 – 7 bar / 73 – 102 psi
Compressed air connection		Plug in connection $\varnothing 10$ mm
Actuation time	– closing – opening	8 s 8 s
Weight		140 kg / 309 lbs
Behavior in case of compressed air pressure drop	– Valve closed – Valve open – During actuation	valve remains closed undefined undefined
Behavior in case of power failure	– Valve closed – Valve open – During actuation	valve remains closed valve closes valve closes

Created by: Kurt Sonderegger	Release date: 14.11.2016	1 of 2
Modified by:	Release date:	868690EA



VAT Vakuumventile AG
CH-9469 Haag, Schweiz


Product data sheet

Large vacuum gate valve, Series 190, DN 400 (ID 16'')
Ordering No. 19052-PE44-0002

Electrical connections

Solenoid valve

Type 5/2 way
Voltage Defined by order

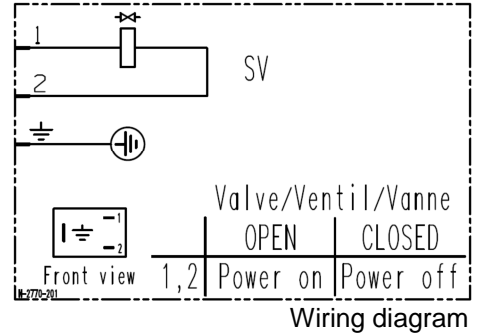

Position indicator

Type PNP (NO with LED)
Voltage 10..30 V DC
Current max. ≤ 0.2 A
Connection Cable, 4 wires
Cable length 2000 mm / 79 inch

