

Product data sheet

Butterfly valve Series 210, DN 160 (6") Ordering No. 21044-PE24-0002

Butterfly Valve Pneumatic actuator, double acting, with position indicator

Advantages

- Four sizes available:
 DN 63, 100, 160 with ISO-F flanges
 DN 250 with ISO-K flanges
- All vacuum parts made of stainless steel
- Robust and compact design with low installation height
- High conductance
- With or without lateral vacuum connections for gauges and valves
- Extremely long cycle life
- Direct pneumatic actuation or via solenoid valve
- Solenoid valve available as accessories
- Electrical and visual position indicator available as accessories



Created by: AMT	Release date: 21.04.2015	1/3
Modified by:	Release date:	795081EA



Product data sheet

Butterfly valve Series 210, DN 160 (6") Ordering No. 21044-PE24-0002

Ordering Information

Selection Data

Vacuum connection	DN 160 ISO-F	
Body, shaft, valve plate AISI / DIN	304 / 1.4301	
Lateral vacuum connections	2 × DN 10 ISO-KF 1 x DN 25 ISO-KF	

Specifications

Cycle life	cycles	1.5 Mio ¹⁾	
Conductance for molecula	ar flow I/s	3400	
Leak rate	mbar l/s	1×10 ⁻⁹	
Pressure range	mbar / bar min / max	1×10 ⁻⁸ / 1.3 (abs)	
Diff. pressure at opening	bar	1.3 ²⁾	
Diff pressure in the plate in either direction	bar	1.3	
Bakeout temp body	°C	150	
Seals		FKM	
Weight	kg	10	

Spare Parts DN 160 ISO-F

Seal kit	580255	
Actuator	587852	
Position indicator	587850	

Accessories

Vacuum connection	DN 160 ISO-F	
Set of connection elements	580706	

¹⁾ Cycle life tested at room temperature and under clean and static conditions. Expandable parts are excluded 2) Opening above atmospheric pressure reduces specified cycle life


Created by: AMT	Release date: 21.04.2015	2/3
Modified by:	Release date:	795081EA



Product data sheet

Butterfly valve Series 210, DN 160 (6") Ordering No. 21044-PE24-0002

Dimensions

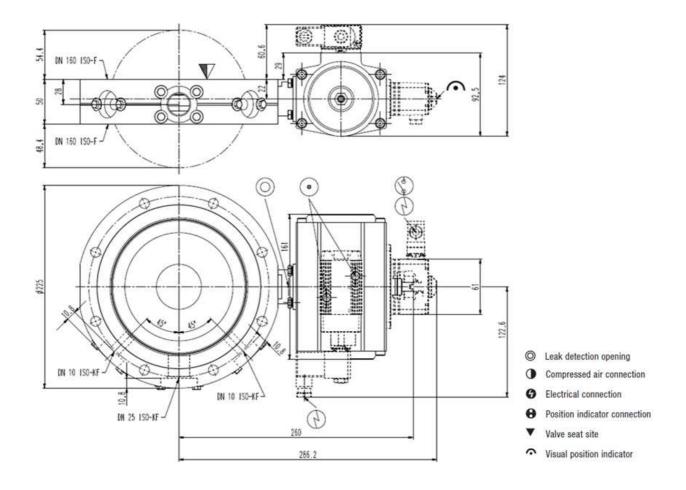

Created by: AMT	Release date: 21.04.2015	3/3
Modified by:	Release date:	795081EA