



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV angle valve
Series 264, DN 63 (ID 2 1/2")
Ordering No. 26436-QA21-0003

Description

| | |
|-------------|---|
| Flange | ISO-K 63 |
| Actuator | Pneumatic, single acting with closing spring – without solenoid valve – with position indicator “open” and “closed” |
| Feedthrough | Bellows |

Technical data

| | | |
|--|--|---|
| Leak rate | – Valve body – Valve seat | $< 1 \cdot 10^{-9}$ mbar ls ⁻¹ $< 1 \cdot 10^{-9}$ mbar ls ⁻¹ |
| Pressure range | | $1 \cdot 10^{-8}$ mbar to 4 bar (abs) |
| Differential pressure on the plate | – In opening direction – In closing direction | ≤ 1.2 bar ≤ 4 bar |
| Differential pressure at opening | | ≤ 1 bar |
| Conductance (molecular flow) | | 160 ls ⁻¹ |
| Closing time | | ≤ 0.7 sec. |
| Cycles until first service (Tmax 80 °C, under clean conditions) | | 3 million |
| Temperature (Maximum values: depending on operating conditions and sealing materials) | – Valve body – Actuator – Position indicator | ≤ 150 °C ≤ 120 °C ≤ 80 °C |
| Material | – Valve body – Actuator – Plate – Bellows | Aluminum (EN AW-6060) Aluminum AISI 316L (1.4404) AISI 316L (1.4404, 1.4435), AISI 316 Ti (1.4571) |
| Seal | – Bonnet O-ring – Plate O-ring – Actuator O-ring | FKM (Viton®) FKM (Viton®) FKM (Viton®) |
| Weight | | 3.70 kg / 8.157 lbs |
| Mounting position | | any |
| Volume of pneumatic actuator | | 0.112 l / 0.0040 ft ³ |
| Compressed air min. – max. overpressure | | 4 – 8 bar / 58 – 116 psi |
| Compressed air connection | | Female 1/8" ISO/NPT |

| | | |
|------------------|--------------------------|-----------------|
| Created by: WARO | Release date: 10.06.2014 | 1/2 |
| Modified by: | Release date: | 753408EA |



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV angle valve

Series 264, DN 63 (ID 2 1/2")


Ordering No. 26436-QA21-0003

| | | |
|--|--|--|
| Behavior in case of compressed air pressure drop | <ul style="list-style-type: none"> - Valve closed - Valve opened - During actuation | <ul style="list-style-type: none"> valve remains closed and leaktight valve closes leaktight valve closes leaktight |
| Behavior in case of power failure | <ul style="list-style-type: none"> - Valve closed - Valve opened - During actuation | <ul style="list-style-type: none"> valve remains closed and leaktight depending on customer installation depending on customer installation |

Electrical connections

Position indicator

| | |
|-------------------------|----------------------|
| Type | Micro switch |
| Voltage | ≤ 50 V AC / DC |
| Current | 5 – 100 mA |
| Short circuit protected | No |
| Connection | Plug M12 5 pin, male |
| Cable length | 500 mm |

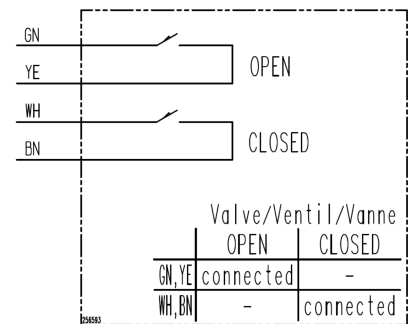

Wiring diagram

| | | |
|------------------|--------------------------|-----------------|
| Created by: WARO | Release date: 10.06.2014 | 2/2 |
| Modified by: | Release date: | 753408EA |