



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV angle valve
Series 264, DN 63 (ID 2 1/2")
Ordering No. 26436-QE21-0003

Description

Flange	ISO-K 63
Actuator	Pneumatic, single acting with closing spring – without solenoid valve – with position indicator “open” and “closed”
Feedthrough	Bellows

Technical data

Leak rate	– Valve body – Valve seat	$< 1 \cdot 10^{-9}$ mbar ls ⁻¹ $< 1 \cdot 10^{-9}$ mbar ls ⁻¹
Pressure range		$1 \cdot 10^{-8}$ mbar to 4 bar (abs)
Differential pressure on the plate	– In opening direction – In closing direction	≤ 1.2 bar ≤ 4 bar
Differential pressure at opening		≤ 1 bar
Conductance (molecular flow)		160 ls ⁻¹
Closing time		≤ 0.7 sec.
Cycles until first service (Tmax 80 °C, under clean conditions)		3 million
Temperature (Maximum values: depending on operating conditions and sealing materials)	– Valve body – Actuator – Position indicator	≤ 150 °C ≤ 120 °C ≤ 80 °C
Material	– Valve body – Actuator – Plate – Bellows	AISI 316L (1.4404) Aluminum AISI 316L (1.4404) AISI 316L (1.4404, 1.4435), AISI 316 Ti (1.4571)
Seal	– Bonnet O-ring – Plate O-ring – Actuator O-ring	FKM (Viton®) FKM (Viton®) FKM (Viton®)
Weight		3.45 kg / 7.606 lbs
Mounting position		any
Volume of pneumatic actuator		0.112 l / 0.0040 ft ³
Compressed air min. – max. overpressure		4 – 8 bar / 58 – 116 psi
Compressed air connection		Female 1/8" (ISO/NPT)

Created by: WARO	Release date: 11.06.2014	1/2
Modified by:	Release date:	753580EA



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV angle valve

Series 264, DN 63 (ID 2 1/2")


Ordering No. 26436-QE21-0003

Behavior in case of compressed air pressure drop	<ul style="list-style-type: none"> - Valve closed - Valve opened - During actuation 	<ul style="list-style-type: none"> valve remains closed and leaktight valve closes leaktight valve closes leaktight
Behavior in case of power failure	<ul style="list-style-type: none"> - Valve closed - Valve opened - During actuation 	<ul style="list-style-type: none"> valve remains closed and leaktight depending on customer installation depending on customer installation

Electrical connections

Position indicator

Type	Micro switch
Voltage	≤ 50 V AC / DC
Current	5 – 100 mA
Short circuit protected	No
Connection	Plug M12 5 pin, male
Cable length	500 mm

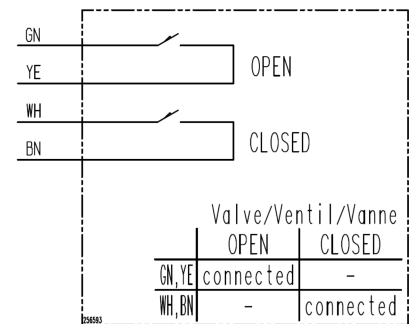

Wiring diagram

Created by: WARO	Release date: 11.06.2014	2/2
Modified by:	Release date:	753580EA