



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV angle valve
Series 264, DN 100 (ID 4'')
Ordering No. 26440-QA24-0001

Description

Flange	ISO-K 100
Actuator	Pneumatic, double acting – without solenoid valve – with position indicator
Feedthrough	Bellows

Technical data

Leak rate	– Valve body – Valve seat	$< 1 \cdot 10^{-9} \text{ mbar ls}^{-1}$ $< 1 \cdot 10^{-9} \text{ mbar ls}^{-1}$
Pressure range		$1 \cdot 10^{-8} \text{ mbar}$ to 2 bar (abs)
Differential pressure on the plate	– In opening direction – In closing direction	$\leq 1.2 \text{ bar}$ $\leq 2 \text{ bar}$
Differential pressure at opening		$\leq 1 \text{ bar}$ [1 bar with reduced number of cycles]
Conductance (molecular flow)		440 ls^{-1}
Actuation time	– Closing – Opening	$\leq 1 \text{ sec.}$ $\leq 1 \text{ sec.}$
Cycles until first service (tested at room temp. under clean and static vacuum conditions)		1 million
Temperature (Maximum values: depending on operating conditions and sealing materials)	– Valve body – Actuator – Position indicator	$\leq 150 \text{ }^{\circ}\text{C}$ $\leq 120 \text{ }^{\circ}\text{C}$ $\leq 80 \text{ }^{\circ}\text{C}$
Material	– Valve body – Actuator – Plate – Bellows	Aluminum (EN AC-42000) Aluminum AISI 316L (1.4404) AISI 316 Ti (1.4571)
Seal	– Bonnet O-ring – Plate O-ring – Actuator O-ring	FKM (Viton®) FKM (Viton®) FKM (Viton®)
Weight		8 kg / 18 lbs
Mounting position		any
Volume of pneumatic actuator		0.3 l / 0.01 ft ³
Compressed air min. – max. overpressure		4.5 – 7 bar / 65 – 102 psi
Compressed air connection		1/8" ISO/NPT female
Behavior in case of compressed air pressure drop	– Valve closed – Valve opened – During actuation	depending on customer installation depending on customer installation depending on customer installation

Created by: LIN	Release date: 19.11.2013	1/2
Modified by:	Release date:	603611EA



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

HV angle valve

Series 264, DN 100 (ID 4'')

Ordering No. 26440-QA24-0001

Behavior in case of power failure

- Valve closed
- Valve opened
- During actuation

depending on customer installation


depending on customer installation

depending on customer installation

Electrical connection

Position indicator

Type	Micro switch
Voltage	≤ 50 V AC / DC
Current	5...100 mA
Short circuit protected	No
Connection	cable, 4 wire
Cable length	500 mm
Wire cross section	0.25 mm ²

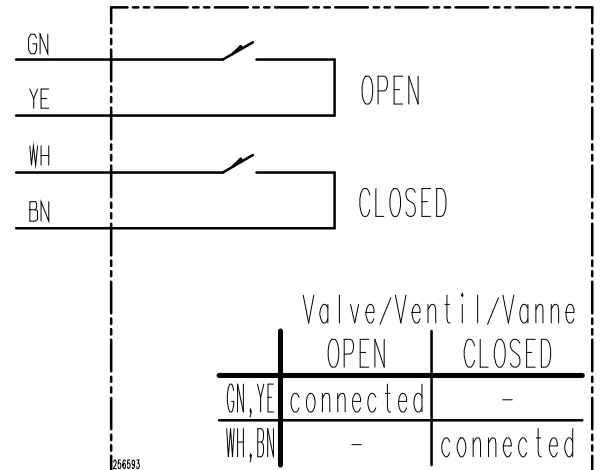

Wiring diagram

Created by: LIN	Release date: 19.11.2013	2/2
Modified by:	Release date:	603611EA