



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

Inline valve with soft-pump function
Series 291, DN 25 (ID 1")
Ordering No. 29128-KA11-0001

Description

| | | |
|-------------|-------------|--|
| Flange | | ISO-KF 25 |
| Actuator | | Pneumatic, single acting with closing spring – without solenoid valve – without position indicator |
| Feedthrough | – Main | Bellows |
| | – Soft-pump | Shaft feedthrough |

Technical data

| | | |
|--|------------------------|--|
| Leak rate | – Valve Body | $< 1 \cdot 10^{-9}$ mbar ls ⁻¹ |
| | – Valve seat | $< 1 \cdot 10^{-9}$ mbar ls ⁻¹ |
| Pressure range | | $1 \cdot 10^{-8}$ mbar to 1.2 bar (abs) |
| Differential pressure on the plate | – In opening direction | ≤ 1.2 bar |
| | – In closing direction | ≤ 1.2 bar |
| Differential pressure at opening | | ≤ 1 bar |
| Conductance (molecular flow) | | 14 ls ⁻¹ |
| Cycles until first service (Tmax 80 °C, under clean conditions) | | 2 million |
| Temperature (Maximum values: depending on operating conditions and sealing materials) | – Valve Body | ≤ 150 °C |
| | – Actuator | ≤ 120 °C |
| Material | – Valve body | Aluminum (EN AW-6082) |
| | – Actuator | Aluminum |
| | – Plate | AISI 316L (1.4435 ESU) |
| | – Bellows | AISI 316L (1.4404, 1.4435), AISI 316 Ti (1.4571) |
| Seal | – Bonnet O-ring | FKM (Viton®) |
| | – Plate O-ring | FKM (Viton®) |
| | – Feedthrough O-ring | FKM (Viton®) |
| | – Actuator O-ring | FKM (Viton®) |
| Mounting position | | any |
| Volume of pneumatic actuator | | 0.011 l / 0.0004 ft ³ |
| Compressed air min. – max. overpressure | | 4 – 8 bar / 58 – 116 psi |
| Compressed air connection | | M5 female (10-32 UNF suitable) |
| Actuation time | – Closing | ≤ 0.20 sec. |
| Weight | | 0.76 kg / 1.68 lbs |

| | | |
|------------------|--------------------------|-----------------|
| Created by: WARO | Release date: 25.08.2014 | 1/2 |
| Modified by: | Release date: | 765406EA |



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

Inline valve with soft-pump function

Series 291, DN 25 (ID 1")

Ordering No. 29128-KA11-0001

Behavior in case of compressed
air pressure drop

- Valve closed
- Valve opened
- During actuation


valve remains closed and leaktight
valve closes leaktight
valve closes leaktight

Behavior in case of power failure

- Valve closed
- Valve opened
- During actuation

valve remains closed and leaktight
depending on customer installation
depending on customer installation

conductance diagram

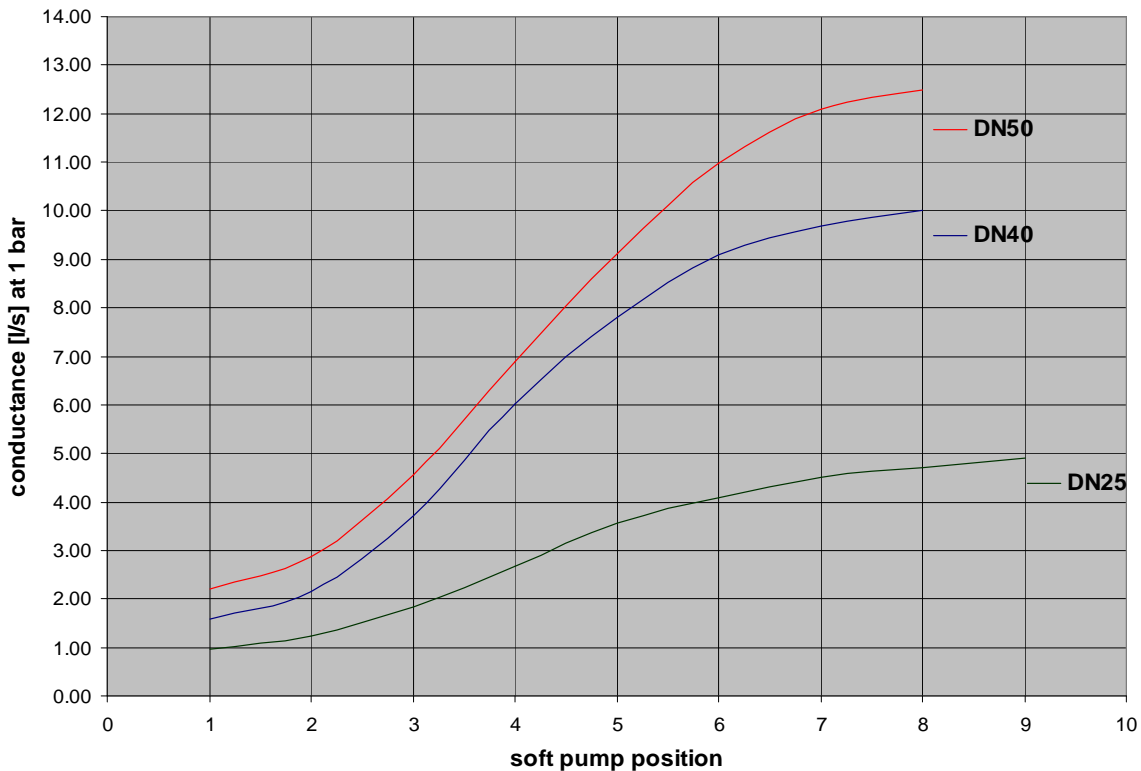

Created by: WARO

Release date: 25.08.2014

2/2

Modified by:

Release date:

765406EA