



VAT Vakuumventile AG  
CH-9469 Haag, Schweiz

## Product data sheet

**Angle valve with soft-pump function**  
**Series 292, DN 160 (ID 6")**  
**Ordering No. 29244-QA24-0001**

### Description

Flange		ISO-K 160
Actuator		without solenoid valve with position indicator
	- Main	Pneumatic, double acting
	- Softpump	Pneumatic, single acting with closing spring
Feedthrough	- Main	Shaft feedthrough
	- Softpump	Bellows

### Technical data

Leak rate (static)	- Valve body	$< 1 \cdot 10^{-9} \text{ mbar ls}^{-1}$
	- Valve seat	$< 1 \cdot 10^{-9} \text{ mbar ls}^{-1}$
Pressure range		$1 \cdot 10^{-7} \text{ mbar}$ to 2 bar (abs)
Differential pressure on the plate	- In opening direction	$\leq 1.2 \text{ bar}$
	- In closing direction	$\leq 2 \text{ bar}$
Differential pressure at opening		$\leq 1 \text{ bar}$ [1 bar with reduced number of cycles]
Conductance (molecular flow)		$1000 \text{ ls}^{-1}$
Actuation time main	- Closing	$\leq 1.5 \text{ sec.}$
	- Opening	$\leq 1.5 \text{ sec.}$
Actuation time softpump	- Closing	$\leq 0.2 \text{ sec.}$
	- Opening	$\leq 0.2 \text{ sec.}$
Cycles until first service (Tmax 80°C, under clean conditions)	- Main	2 million
	- Softpump	3 million
Temperature (Maximum values: depending on operating conditions and sealing materials)	- Valve body	$\leq 150 \text{ °C}$
	- Actuator	$\leq 120 \text{ °C}$
	- Position indicator	$\leq 80 \text{ °C}$
Material	- Body main	Aluminum (EN AC-42000)
	- Body softpump	Aluminum (EN AW-6060)
	- Actuator	Aluminum
	- Plate main	Aluminum (EN AW 6082)
	- Plate soft	AISI 316L (1.4404)
	- Feedthrough main	Aluminum (EN AW 6082)
	- Feedthrough soft	AISI 316L (1.4404, 1.4435), AISI 316 Ti (1.4571)
Seal	- Bonnet O-ring	FKM (Viton®)
	- Plate O-ring	FKM (Viton®)
	- Feedthrough O-ring	FKM (Viton®)
	- Actuator O-ring	FKM (Viton®)
Weight		13 kg / 20 lbs
Mounting position		any
Volume of pneumatic actuator	- Main	0.35 l / 0.012 ft <sup>3</sup>
	- Softpump	0.011 l / 0.0004 ft <sup>3</sup>

Created by: LIN	Release date: 19.11.2013	1/3
Modified by:	Release date:	<b>604095EA</b>




VAT Vakuumventile AG  
CH-9469 Haag, Schweiz

## Product data sheet

### Angle valve with soft-pump function Series 292, DN 160 (ID 6") Ordering No. 29244-QA24-0001


Compressed air min. – max. overpressure	– Main – Softpump	4.5 – 7 bar / 65 – 102 psi 4 – 8 bar / 58 – 115 psi
Compressed air connection	– Main – Softpump	1/8" ISO/NPT female M5 (10-32 UNF suitable)
Behavior in case of compressed air pressure drop	– Valve closed – Valve opened – During actuation	depending on customer installation depending on customer installation depending on customer installation
Behavior in case of power failure	– Valve closed – Valve opened – During actuation	depending on customer installation depending on customer installation depending on customer installation

#### Conductance diagram

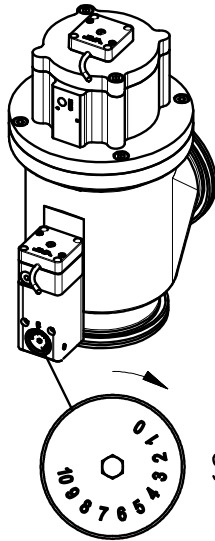

Scale

#### Flow Chart [sl/s]

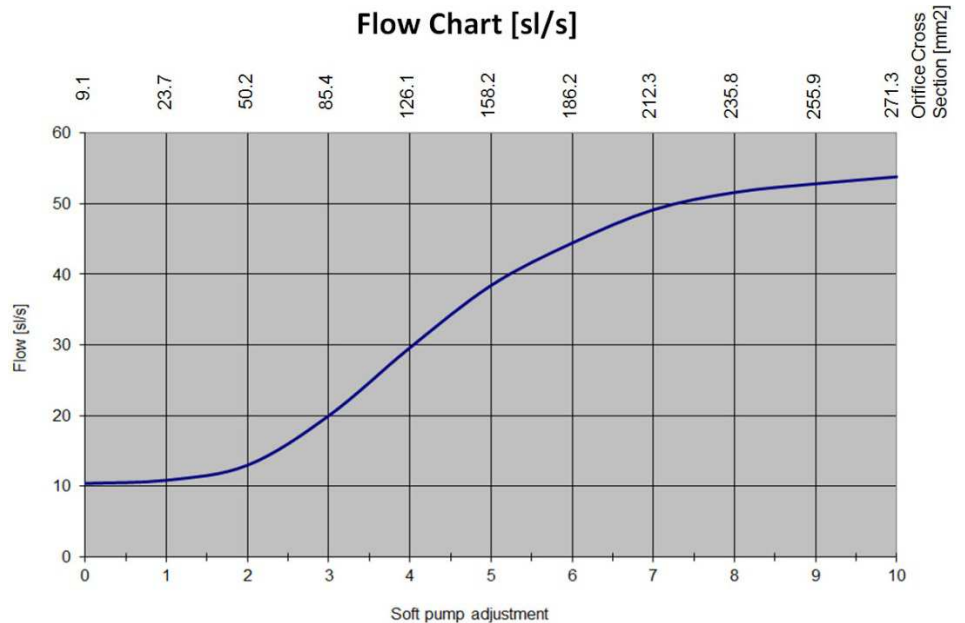

Created by: LIN	Release date: 19.11.2013	2/3
Modified by:	Release date:	<b>604095EA</b>



VAT Vakuumventile AG  
CH-9469 Haag, Schweiz


## Product data sheet

**Angle valve with soft-pump function**  
**Series 292, DN 160 (ID 6")**  
**Ordering No. 29244-QA24-0001**

### Electrical connection

#### Position indicator

Type	Micro switch
Voltage	≤ 50 V AC / DC
Current	5...100 mA
Short circuit protected	No
Connection	cable, 4 wire
Cable length	500 mm
Wire cross section	0.25 mm <sup>2</sup>

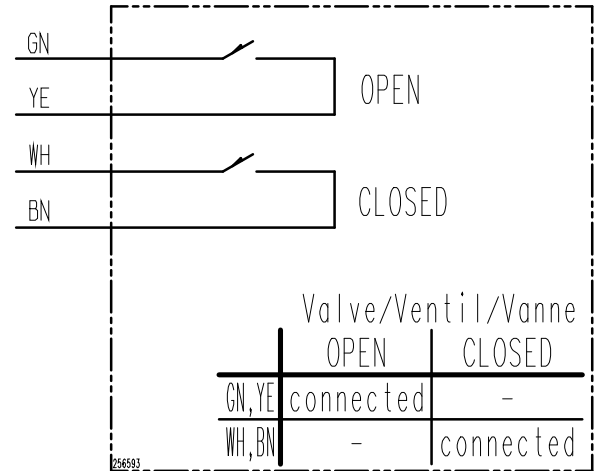

Wiring diagram

Created by: LIN	Release date: 19.11.2013	3/3
Modified by:	Release date:	<b>604095EA</b>