



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

All-Metal Angle Valve, Series 57, DN 100 (ID 4") OSL-Article No. 57040-GE41-0005

Description

| | |
|-------------|---|
| Flange | DN 100 CF-R |
| Actuator | pneumatic single acting with closing spring, with position indicator, with solenoid |
| Feedthrough | bellows |

Technical data

| | |
|---|---|
| Leak rate | |
| - To the outside | $\leq 1 \cdot 10^{-10}$ mbar ls ⁻¹ |
| - Seat | $\leq 1 \cdot 10^{-10}$ mbar ls ⁻¹ |
| Molecular flow conductance | 380 ls ⁻¹ |
| Pressure range | (T= 200°C) (T= 450°C) |
| Test pressure | extreme UHV to 5 bar (abs) extreme UHV to 3.5 bar (abs) |
| Differential pressure on the gate | |
| - in closing and opening direction | ≤ 5 bar |
| Max. differential pressure at opening | |
| - in closing and opening direction | 1 bar (any differential pressure at opening might reduce the lifetime of the valve) |
| Cycles until first service | 10'000 |
| Bake-out temperature | |
| Valve body | |
| - open | $\leq 450^\circ\text{C}$ |
| - closed | $\leq 350^\circ\text{C}$ |
| Pneumatic actuator (spring closing) | $\leq 150^\circ\text{C}$ |
| Position indicator | $\leq 80^\circ\text{C}$ |
| Solenoid | $\leq 80^\circ\text{C}$ |
| Heating and cooling rate | $\leq 60^\circ\text{C h}^{-1}$ |
| Material | |
| - Body, Mechanism (in contact with media) | 1.4306, AISI 304 L; 1.4435, AISI 316 L, |
| - Bellows | 1.4404, AISI 316 L |
| - actuator | aluminium |
| Seal | |
| - Bonnet, Plate | metal |
| - actuator | FKM (Viton®) |
| Mounting position | any |
| Solenoid | |
| - Supply voltage | according to P.O. |
| - Power required | 2.5 W |
| Position indicator contact rating | ≤ 50 V AC / DC; ≤ 1.2 A |

| | | |
|----------------------------|--------------------------|-----------------|
| Created by: K. Sonderegger | Release date: 28.07.2011 | Page 1 of 2 |
| Modified by: | Release date: | 290831EA |



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

All-Metal Angle Valve, Series 57, DN 100 (ID 4") OSL-Article No. 57040-GE41-0005

Radiation resistance

- Valve 10^8 Gy (10^{10} rad)
- Actuator 10^5 Gy (10^7 rad)
- Position indicator 10^5 Gy (10^7 rad)
- Solenoid 10^4 Gy (10^6 rad)

Compressed air pressure

6 – 9 bar / 85-130 psig (over pressure)

Compressed air connection

R 1/8"

Volume compressed air cylinder

1.8 l / 0.064 ft³

Behaviour in case of power failure

- Valve closed Valve remains closed and leaktight
- Valve open Valves closes

Behaviour in case of compressed air pressure drop

- Valve closed Valve remains closed and leaktight
- Valve open Valve closes

Opening and closing time

4 s

Weight

35 kg / 77 lbs



Dimensions

Dimensional drawing No. 501508

Connection diagrams

Standard position indicator with make contact switches

Solenoid (SV)

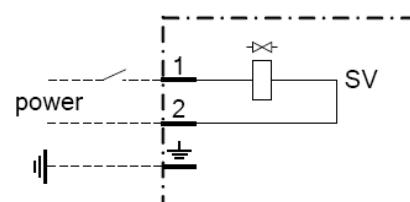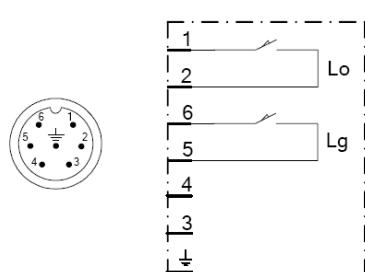

Lo = position indicator open

Lg = position indicator closed

| | | |
|----------------------------|--------------------------|-----------------|
| Created by: K. Sonderegger | Release date: 28.07.2011 | Page 2 of 2 |
| Modified by: | Release date: | 290831EA |