



VAT Vakuumventile AG
CH-9469 Haag, Schweiz

Product data sheet

Pendulum valve, Series 162, DN 350 (ID 14'')
Ordering No. 16251-JA21

Description

Flange	JIS 350
Actuator	– pneumatic, single acting, with closing spring (NC) – with position indicator
Feedthrough	Rotary feedthrough

Technical data

Leak rate	– Valve body – Valve seat	$< 1 \cdot 10^{-9}$ mbar ls ⁻¹ $< 1 \cdot 10^{-9}$ mbar ls ⁻¹
Pressure range		$1 \cdot 10^{-8}$ mbar to 1.2 bar (abs)
Differential pressure on the gate		≤ 1.2 bar
Differential pressure at opening		≤ 5 mbar
Conductance (molecular flow)		41 500 ls ⁻¹
Cycles until first service		200 000 (unheated and under clean conditions)
Temperature (Maximum values: depending on operating conditions and sealing materials)	– Valve body – Actuator – Position indicator	≤ 120 °C ≤ 80 °C ≤ 80 °C
Heating and cooling rate		≤ 30 °C h ⁻¹
Material	– Valve body, gate, sealing ring – Feedthrough	EN AW-5083 (3.3547), EN AW-6082 (3.2315) AISI 303 (1.4305), AISI 304 (1.4301)
Seal	– Bonnet – Gate, dynamic – Feedthrough	FKM (Viton®) FKM (Viton®) FKM (Viton®)
Mounting position		any
Volume of pneumatic actuator		0.60 l / 0.021 ft ³
Compressed air min. – max. overpressure		5 – 7 bar / 73 – 102 psi
Compressed air connection		M5 (10-32 UNF suitable)
Required air flow		> 55 slm

Created by: MAEM	Release date: 2016-05-03	1 of 2
Modified by:	Release date:	267277EB



VAT Vakuumventile AG
CH-9469 Haag, Schweiz


Product data sheet

Pendulum valve, Series 162, DN 350 (ID 14'')
Ordering No. 16251-JA21

Actuation time	- closing	5 s
	- opening	5 s
Weight		65 kg / 143.3 lbs
Behavior in case of compressed air pressure drop	- Valve closed - Valve open	valve remains closed valve closes
Behavior in case of power failure	- Valve closed - Valve open	depending on customer installation depending on customer installation

Position indicator

Type	Micro switch
Voltage	≤ 50 V AC / DC
Current max.	≤ 1.2 A

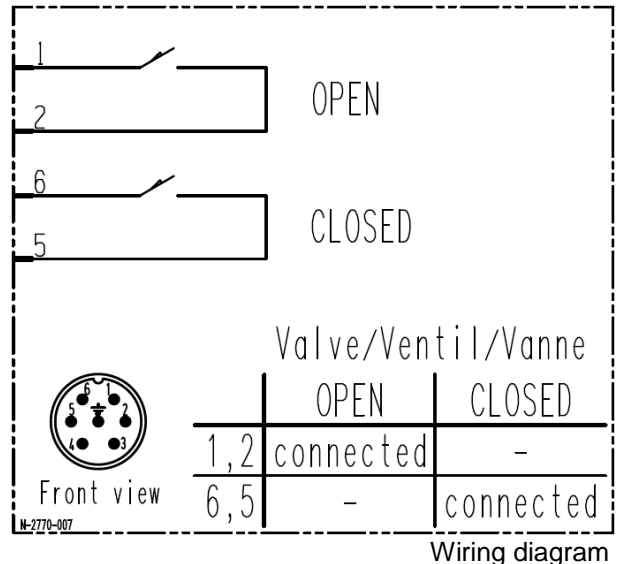

Created by: MAEM	Release date: 2016-05-03	2 of 2
Modified by:	Release date:	267277EB